




# H100

## Portable Load Indicator

- Battery Powered
- Accepts All Load Cell Inputs
- Display in kg, Tonnes, lbs, kN
- Dual Units
- Auto Shut-Off

Display Units	kg, Tonne, lbs, kN
Input Sensitivity	0.2 – 2.5 mV/V
Power Supply	1 x PP3 battery
Excitation	5 Vdc
Max. Display Counts	19999
Accuracy	+/- 0.02 % of range
Environmental Sealing	IP54 (to BS EN60529)
Temp. effect on span	< 30 ppm/°C
Temp. effect on Zero	0.2 $\mu$ V/°C

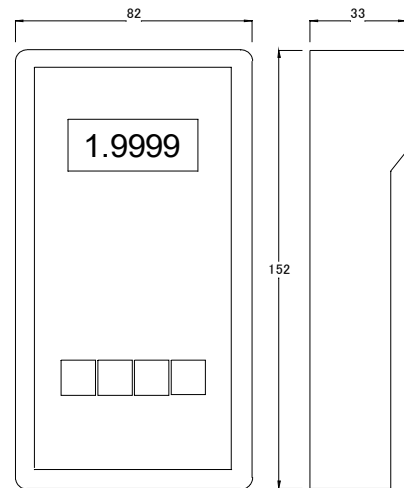

Dimensions in mm

### Options:

- Supplied calibrated with any of our load cells
- RS232 output

The information provided is intended for product description only.  
 Specifications are subject to change.  
 Full product details available on request.

### Force Logic UK Ltd

N4 Lambs Farm Business Park  
 Swallowfield  
 Berkshire RG7 1PQ  
 UK  
 +44 (0)118 988 8807  
 info@force-logic.co.uk    www.force-logic.co.uk

**Force**  


---

**LOGIC** UK  
 Manufactured in the UK 